Internal
Fax Modem 56K

Quick Installation Guide

M73-APO02-300

Downloaded from www.Manualslib.com manuals search engine

FCC REGULATORY STATEMENTS

FCC Part 68 Registration

This device complies with FCC Part 68 rules, and the use of this device is subject to the following restrictions:

1. The FCC has established rules which permit this device to be directly connected to the telephone network. Standardized jacks are used for these connections. This equipment should not be used on party lines or coin phones.
2. If this device is malfunctioning, it may also be causing harm to the telephone network; this device should be disconnected until the source of the problem can be determined and until repair has been made. If this is not done, the telephone company may temporarily disconnect service.
3. The telephone company may make changes in it's facilities, equipment, operation and procedures; if such changes affect the compatibility or use of this device, the telephone company is required to give adequate notice of the situation with the FCC.
4. If the telephone company requests information on what equipment is connected to their lines, inform them of:
   a. The telephone number to which this unit is connected.
   b. The Ringer Equivalence Number (REN).
   c. The USOC jack required.
   d. The FCC Registration number.

Items (b) and (d) are indicated on the label. The Ringer Equivalence Number (REN) is used to determine how many devices can be connected to your telephone line. In most areas, the sum of the REN's of all the devices on any one line should not exceed 5.0. If too many devices are attached, they may not ring properly.

FCC Part 15 Registration

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interface, and
2. This device must accept any interface received including interface that may cause undesired operation.

Downloaded from www.Manualslib.com manuals search engine

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult an experienced radio/TV technician for help.

CTR 21 pan-European Certification

This equipment has been approved in accordance with Council Decision 98/482/EC for pan-European single terminal connection to the public switched telephone network (PSTN). However, due to differences between the individual PSTNs provided in different countries, the approval does not, of itself, give an unconditional assurance of successful operation on every PSTN network termination point. In the event of problems, you should contact your equipment supplier in the first instance.

This device is designed to work with the notified networks in all EC member states. Nevertheless, some of the network services in individual countries might not be supported, but they will not affect the normal data and fax applications. For example, the metering charge service in Germany. Besides you may encounter difficulty of using PULSE dialing function in some of the countries, such as Nordic countries. This kind of network compatibility is dependent on the

Downloaded from www.Manualslib.com manuals search engine

physical and software settings of this device. If the users are desired to use this device on those networks, they should contact the vendor or supplier first.

Downloaded from www.Manualslib.com manuals search engine

Table of Contents

HARDWARE INSTALLATION 1

SOFTWARE INSTALLATION..... 2

WINDOWS 95/98/98SE INSTALLATION..... 2
WINDOWS 2000 INSTALLATION 4
WINDOWS ME INSTALLATION..... 7
WINDOWS XP INSTALLATION 9
WINDOWS NT INSTALLATION 15

Downloaded from www.Manualslib.com manuals search engine

HARDWARE INSTALLATION

Precautions:
Please be sure you take adequate anti-static precautions when handling this product. The simplest way to achieve this is; before you begin and every minute or so during the hardware installation touch a non-painted surface of the computer's chassis.

1. Before installing the device, make sure the computer is turned off.
2. Remove the expansion slot cover from the computer.
3. Carefully slide the PCI modem card into an available PCI slot, push it evenly and firmly home and ensure it is screwed securely in place using the mounting screw (PCI slots are 85mm long and positioned 40mm from the PC's rear panel. Generally there are several PCI slots side by side).
4. Plug one end of the telephone cable into the Modem line jack and the other end to the telephone jack in the wall.
5. Replace the cover.
6. After hardware installation is done, move on to the software installation.

Downloaded from www.Manualslib.com manuals search engine

SOFTWARE INSTALLATION

Windows 95/98/98SE Installation

1. Restart the computer system after the modem is correctly plugged into the PCI slot of your computer. Windows will automatically detect the device. Click **Next.**
2. When the following dialog box appears, insert the device driver compact disc into your CD-ROM drive and click **Next**.

Add New Hardware Wizard
What do you want Windows to do?
Search for the best driver for your device. (Recommended).
Display a list of all the drivers in a specific location, so you can select the driver you want.
< Back
Next >
Cancel

3. Select **Specify a location** and press **Browse** to choose the folder **driver/win95/98** in your CD-ROM drive. Then click **Next.**

Downloaded from www.Manualslib.com manuals search engine

Add New Hardware Wizard
Windows will search for new drivers in its driver database on your hard drive, and in any of the following selected locations. Click Next to start the search.
Floppy disk drives
CD-ROM drive
Microsoft Windows Update
Specify a location:
E:\Driver\Win9X
Browse...
< Back
Next >
Cancel

4. Click **Next** to continue.

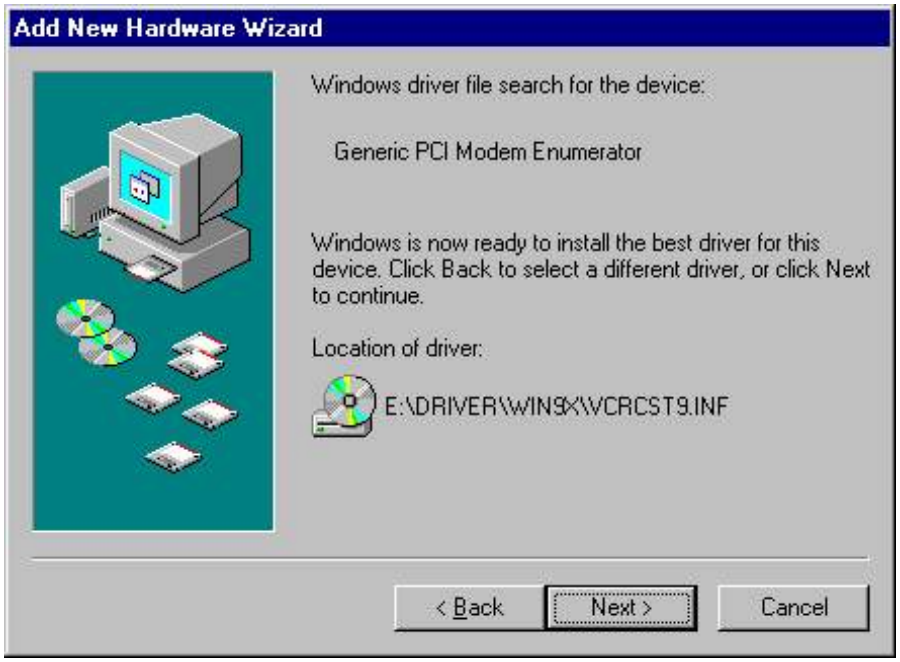
Add New Hardware Wizard
Windows driver file search for the device:
Generic PCI Modem Enumerator
Windows is now ready to install the best driver for this device. Click Back to select a different driver, or click Next to continue.
Location of driver:
E:\DRIVER\WIN9X\VCRCST9.INF
< Back
Next >
Cancel

5. When the following figure appears, click **Finish.** The Installation program will continue.

Downloaded from www.Manualslib.com manuals search engine

Add New Hardware Wizard
Generic PCI Modem Enumerator
Windows has finished installing the software that your new hardware device requires.
< Back
Finish
Cancel

6. The program will proceed automatically. Click **Finish** to complete software installation.

Windows 2000 Installation

1. Restart the computer system after the modem is correctly plugged into the PCI slot of your computer. Windows will automatically detect the device. Click **Next.**

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install a device driver for a hardware device.
To continue, click Next.
< Back
Next >
Cancel

Downloaded from www.Manualslib.com manuals search engine

2. Follow the on-screen instructions to proceed. (Click **Next** to continue.)

Found New Hardware Wizard
Install Hardware Device Drivers
A device driver is a software program that enables a hardware device to work with an operating system.
This wizard will complete the installation for this device:
PCI Simple Communications Controller
A device driver is a software program that makes a hardware device work. Windows needs driver files for your new device. To locate driver files and complete the installation click Next.
What do you want the wizard to do?
Search for a suitable driver for my device (recommended)
Display a list of the known drivers for this device so that I can choose a specific driver
< Back
Next >
Cancel

3. Select **Specify a Location**. Click the **Next** button.

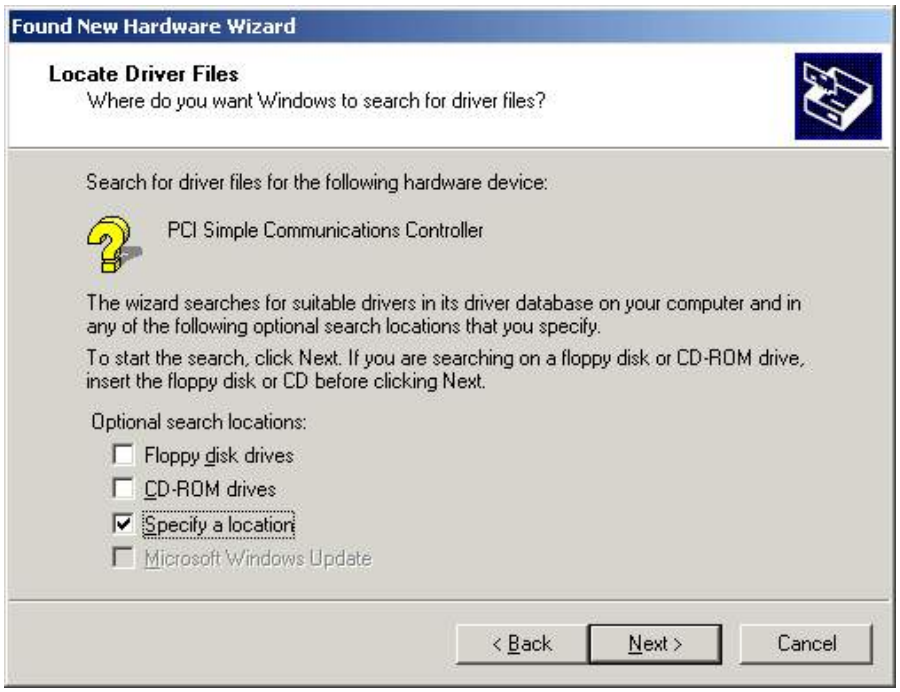
Found New Hardware Wizard
Locate Driver Files
Where do you want Windows to search for driver files?
Search for driver files for the following hardware device:
PCI Simple Communications Controller
The wizard searches for suitable drivers in its driver database on your computer and in any of the following optional search locations that you specify.
To start the search, click Next. If you are searching on a floppy disk or CD-ROM drive, insert the floppy disk or CD before clicking Next.
Optional search locations:
Floppy disk drives
CD-ROM drives
Specify a location
Microsoft Windows Update
< Back
Next >
Cancel

4. Load the Compact Disc that contains the device driver into your CD-ROM drive. Click **Browse** and select the proper file

Downloaded from www.Manualslib.com manuals search engine

location with the disc drive followed by **Driver\Win2K**.

5. Follow the on-screen instructions to proceed. (Click **Next** to continue.)

Found New Hardware Wizard
Driver Files Search Results
The wizard has finished searching for driver files for your hardware device.
The wizard found a driver for the following device:
PCI Simple Communications Controller
Windows found a driver for this device. To install the driver Windows found, click Next.
e:\driver\win2k\vcrcst5.inf
< Back
Next >
Cancel

6. When Windows prompt you to continue the installation. Select **Yes**.

Downloaded from www.Manualslib.com manuals search engine

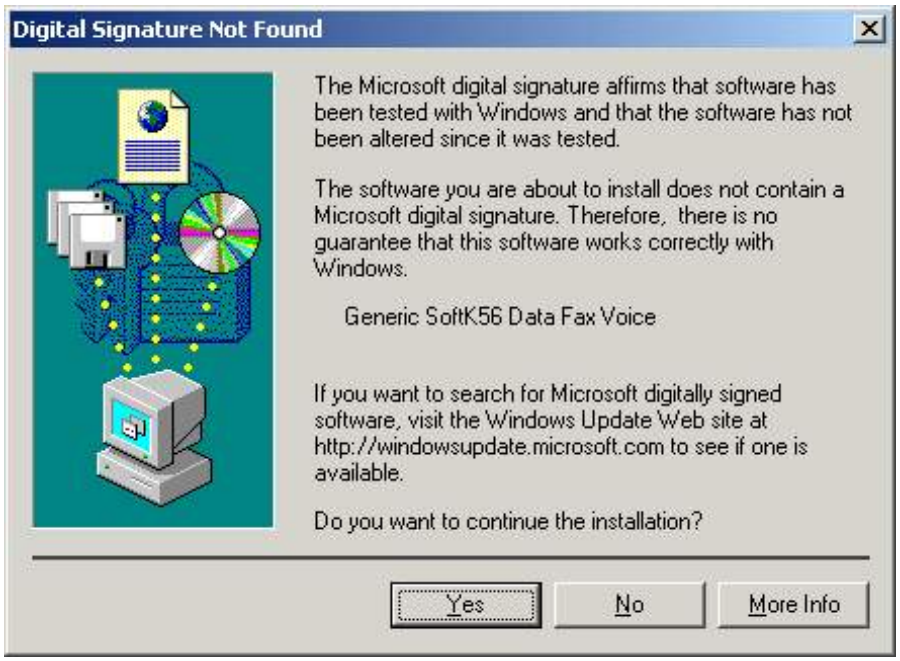
Digital Signature Not Found
The Microsoft digital signature affirms that software has been tested with Windows and that the software has not been altered since it was tested.
The software you are about to install does not contain a Microsoft digital signature. Therefore, there is no guarantee that this software works correctly with Windows.
Generic SoftK56 Data Fax Voice
If you want to search for Microsoft digitally signed software, visit the Windows Update Web site at http://windowsupdate.microsoft.com to see if one is available.
Do you want to continue the installation?
Yes
No
More Info

7. Click **Finish** to complete the software installation.

Found New Hardware Wizard
Completing the Found New Hardware Wizard
Generic SoftK56 Data Fax Voice
Windows has finished installing the software for this device.
To close this wizard, click Finish.
< Back
Finish
Cancel

Windows ME Installation

1. Restart the computer system after the modem is correctly plugged into the PCI slot of your computer. Windows will automatically detect the device. Select **Specify the location of the driver [Advanced]**, (Click **Next** to continue.)**.**

Downloaded from www.Manualslib.com manuals search engine

Add New Hardware Wizard
Windows has found the following new hardware:
PCI Communication Device
Windows can automatically search for and install software that supports your hardware. If your hardware came with installation media, insert it now and click Next.
What would you like to do?
Automatic search for a better driver (Recommended)
Specify the location of the driver (Advanced)
< Back
Next >
Cancel

2. Load the Compact Disc that contains the device driver into your CD-ROM drive. Click **Browse** and select the proper file location with the disc drive followed by **Driver\Millennium**.

Add New Hardware Wizard
Windows will search for new drivers in its driver database on your hard drive, and in any of the following selected
Search for the best driver for your device. (Recommended).
Removable Media (Floppy, CD-ROM...)
Specify a location:
E:\Driver\Millennium
Browse
Display a list of all the drivers in a specific location, so you can select the driver you want.
< Back
Next >
Cancel

3. Follow the on-screen instructions to proceed. (Click **Next** to continue.)

Downloaded from www.Manualslib.com manuals search engine

Add New Hardware Wizard
Windows driver file search for the device:
Generic PCI Modem Enumerator
Windows is now ready to install the best driver for this device. Click Back to select a different driver, or click Next to continue.
Location of driver:
E:\DRIVER\MILLEN~5\VCRCST2.INF
< Back
Next >
Cancel

4. Click **Finish** to complete the software installation.

Windows XP Installation

Restart the computer system after the modem is properly plugged into the PCI slot of your computer. Windows XP will automatically detect the device.

1. Go to **Control Panel→ System→ Hardware→ Device Manager→ Modems.**

Downloaded from www.Manualslib.com manuals search engine

When Windows prompt the following picture, Right-click **Generic SoftK56.** Select **Properties.**

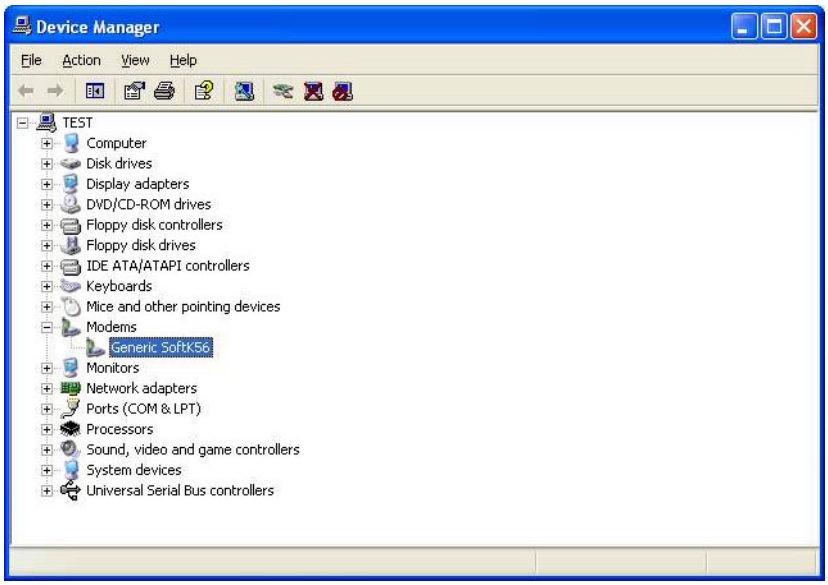

2. When you see the following picture, select **Driver**. Then click **Update Driver**…button.

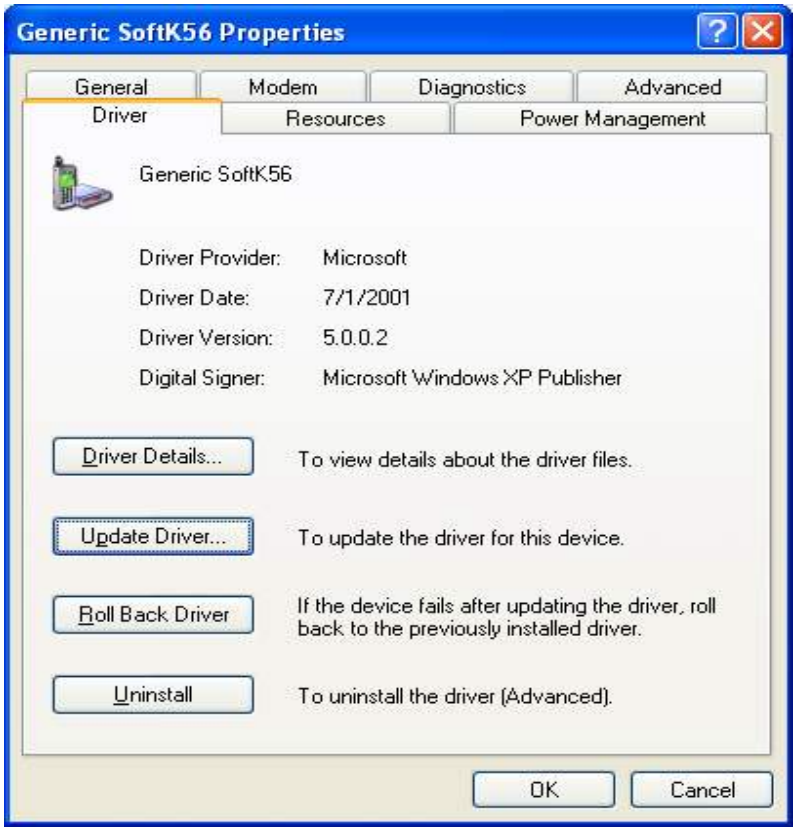

3. Click **OK** and load the device driver Compact Disc into your CD-ROM drive.

Downloaded from www.Manualslib.com manuals search engine

4. Select **Install from a list of specific location (Advanced)** when you see the following picture. Click **Next** to continue.

Hardware Update Wizard
Welcome to the Hardware Update Wizard
This wizard helps you install software for:
Generic SoftK56
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

5. Select **Don't search. I will choose the driver to install**. Click **Next**.

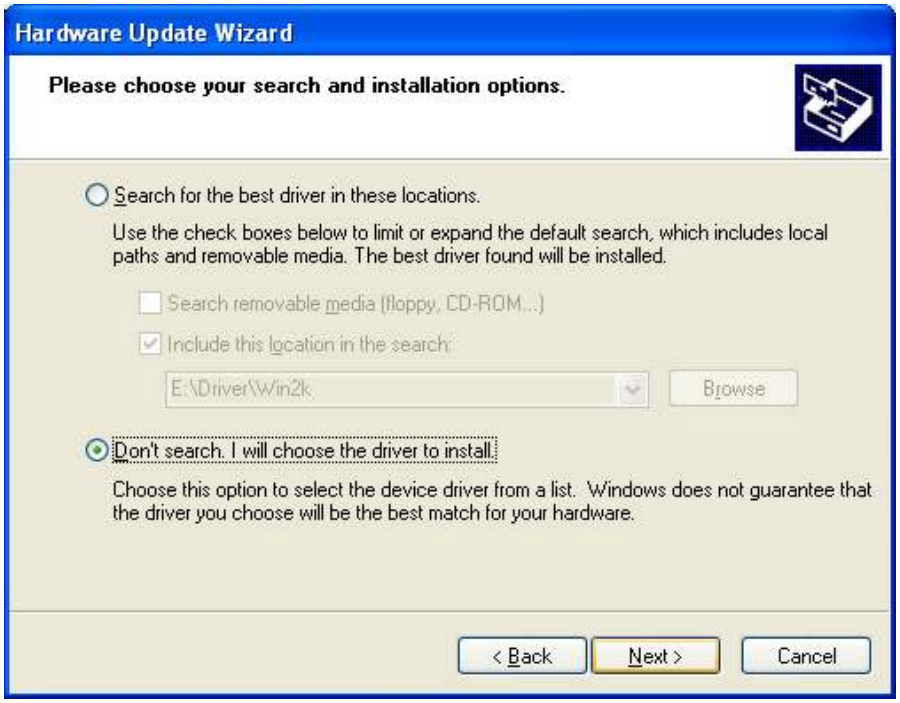
Hardware Update Wizard
Please choose your search and installation options.
Search for the best driver in these locations.
Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.
Search removable media (floppy, CD-ROM...)
Include this location in the search:
E:\Driver\Win2k
Browse
Don't search. I will choose the driver to install.
Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.
< Back
Next >
Cancel

6. Click **Have Disk**.

Downloaded from www.Manualslib.com manuals search engine

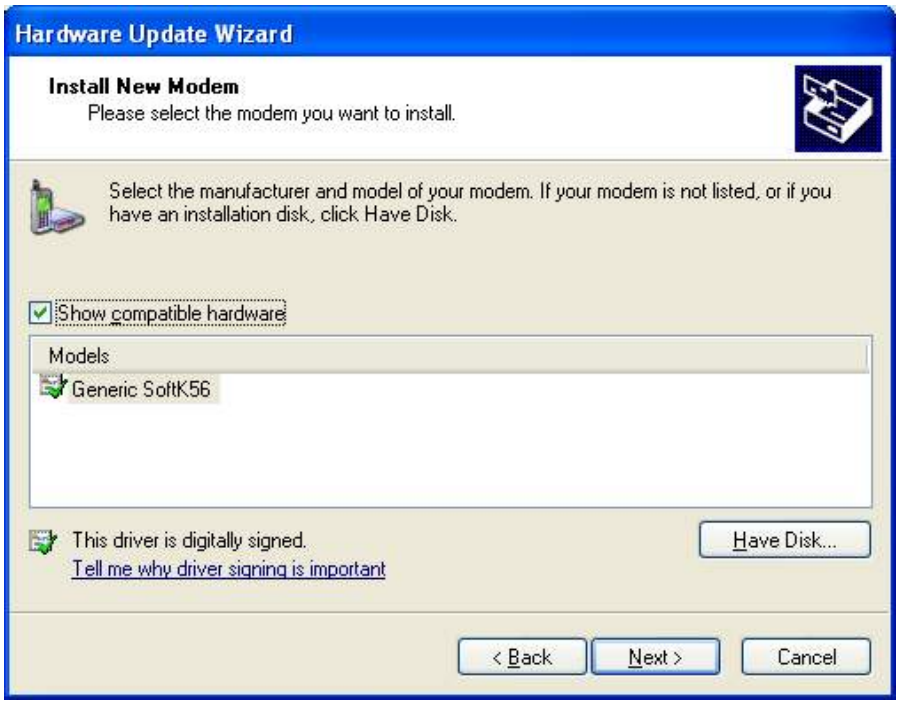
Hardware Update Wizard
Install New Modem
Please select the modem you want to install.
Select the manufacturer and model of your modem. If your modem is not listed, or if you have an installation disk, click Have Disk.
Show compatible hardware
Models
Generic SoftK56
This driver is digitally signed.
Tell me why driver signing is important
Have Disk...
< Back
Next >
Cancel

7. Click the **Browse…** button to select the **E:\ Driver\WinXP** folder in your CD-ROM drive.
8. Select the **DCRCST5** file in WinXP folder. Click **Open** to continue.

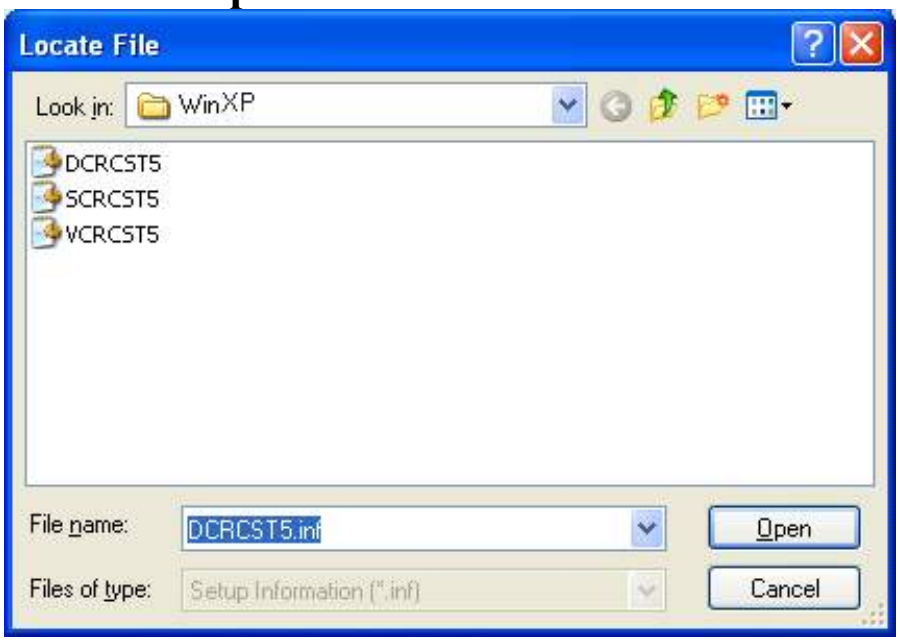

9. Click **OK**.

Downloaded from www.Manualslib.com manuals search engine

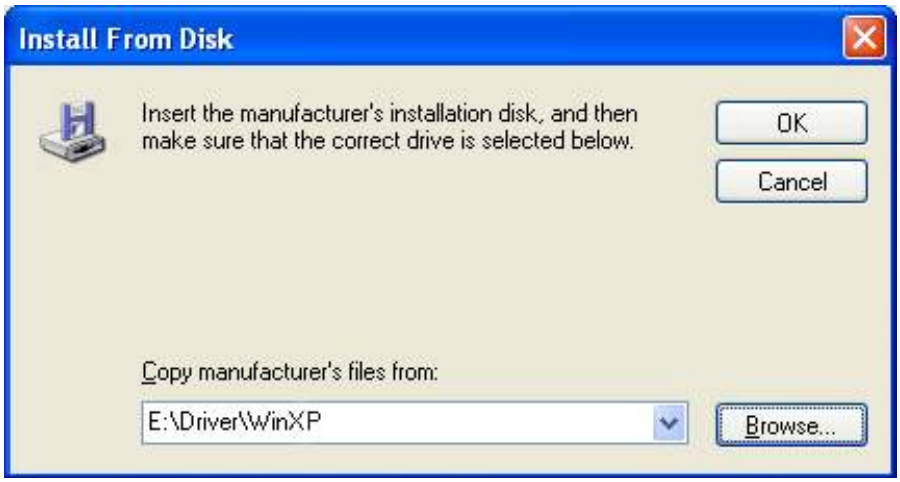

10. Click **Next**.

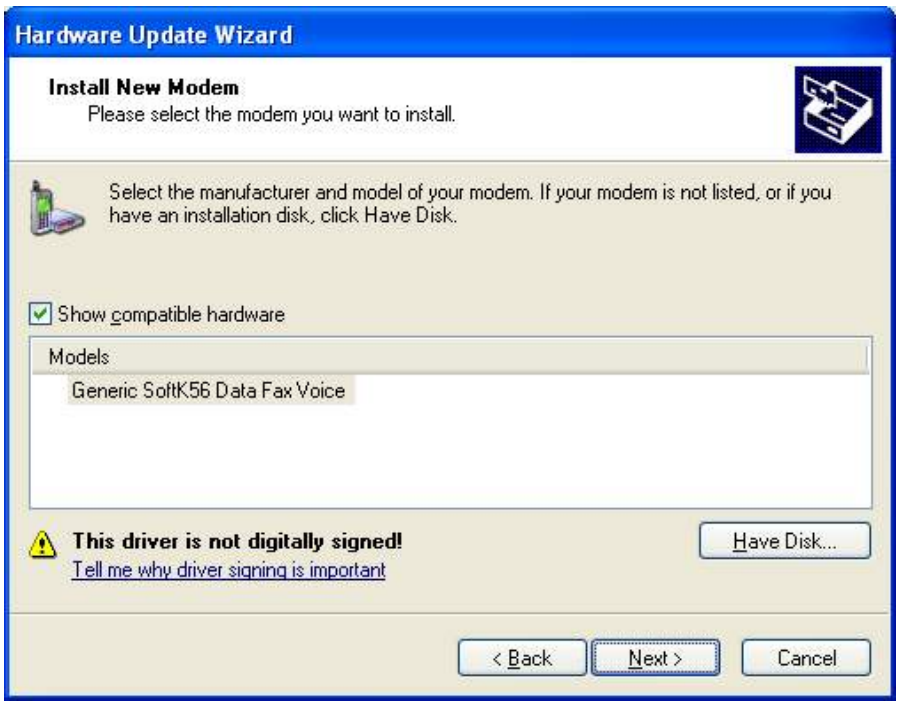
Hardware Update Wizard
Install New Modem
Please select the modem you want to install.
Select the manufacturer and model of your modem. If your modem is not listed, or if you have an installation disk, click Have Disk.
Show compatible hardware
Models
Generic SoftK56 Data Fax Voice
This driver is not digitally signed!
Tell me why driver signing is important
Have Disk...
< Back
Next >
Cancel

11. Click **Continue Anyway** when the following picture appears.

Downloaded from www.Manualslib.com manuals search engine

Hardware Installation
The software you are installing for this hardware:
Generic SoftK56 Data Fax Voice
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

12. The installation program will proceed automatically.
13. Click **Finish** to complete the software installation.

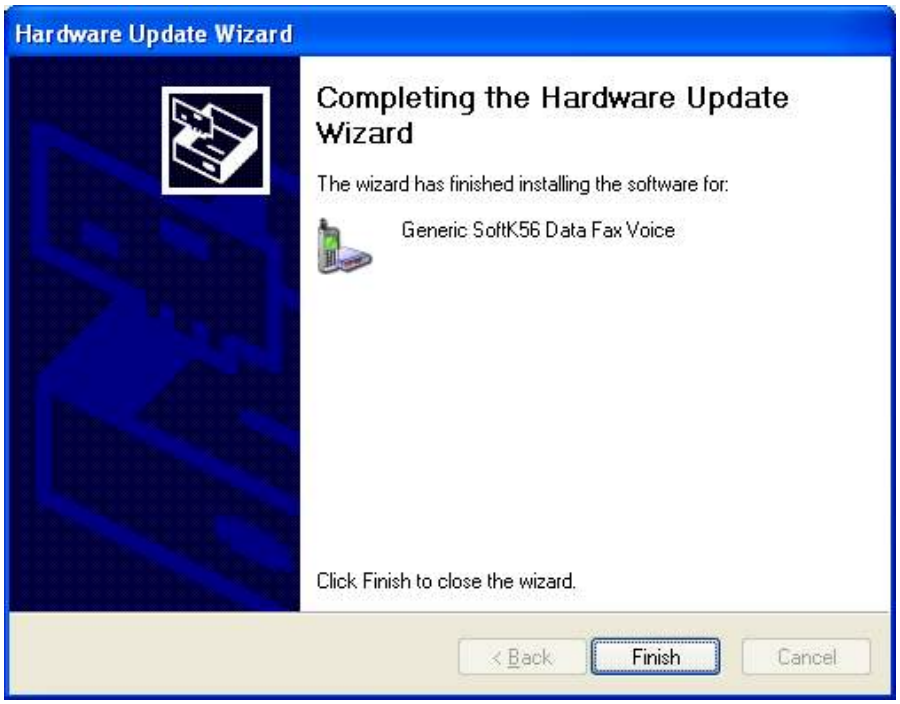

14. Click **Close**.

Downloaded from www.Manualslib.com manuals search engine

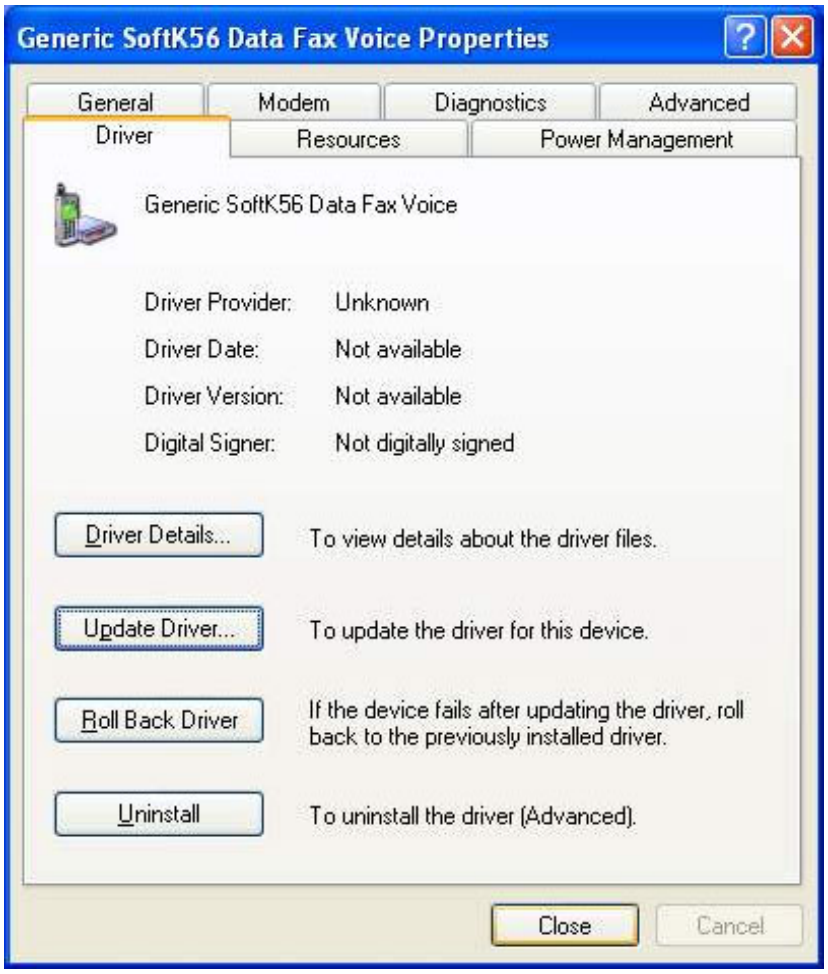

Windows NT Installation

1. Reboot the computer system after the modem is correctly plugged into your PCI slot of computer.
2. Load the device driver compact disk in the CD-ROM drive.
3. Start Windows NT.
4. Go to **My Computer**.
5. Click the CD-ROM drive. Click the **driver\winnt** folder. Or you may click the **Browse** button to select the CD-ROM drive and the **driver\winnt** folder.
6. Double-click **setup.exe**. The installation program will proceed automatically.

Downloaded from www.Manualslib.com manuals search engine